

Installation Instructions



1. **MAKE SURE THE RIFLE IS UNLOADED!**

This stock is designed for the milled receiver version of the AK. If you have a stamped receiver, this unit will not work!

Please go online, or contact us by phone for the stamped receiver version.



2. Insert the knuckle of the adjustable stock into the rear of the milled receiver. Wearing eye protection, use the supplied 3/32" drill bit to start a pilot hole. The hole should be approx. 3/4" deep into the stock through the screw hole on the receiver tang.

Note: Adding a drop of soap to the threads of the screw will ease the process.




3. Insert the screw into the tang hole and tighten. Installation is now complete.

Enhance the look of your AK even more by adding a SAW style pistol grip!

Operation Instructions



Apply upward pressure to the lever to allow the stock to move.

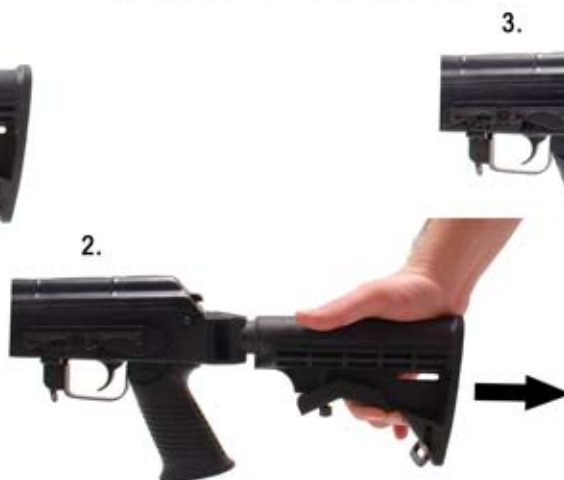

Release pressure from the lever to lock the stock at the desired length.

To adjust the stock length, you must first grip the body of the stock and compress the lever as pictured. While holding down the lever, slide the rear of the stock into the desired position. Release the lever to lock the stock at desired length. To remove the body completely, firmly pull downward on the lever to disengage the plunger and slide the body off the tube.